



APPROVAL SHEET
FOR
MAGNETIC BUZZER

深圳市銳創達電子有限公司

TAT ELECTRONICS CO., LTD.

CUSTOMER:

MODEL NO.: BM5020S-0540-12

OUR PART NO..:

CUSTOMER PART NO.:

CUSTOMER	APPROVED	CHECKED

Add: Rm 1610, Pengji Wisdom Center, Bagua 1st Rd, Futian Dist,
Shenzhen, Guangdong, China

深圳市福田区八卦一路鹏基商务时空 1610

Tel: +86-755-8950 9282, 82370515;

Fax: +86-755-89509880

Email: tatspeaker@tatelec.com;

[Http:// www.tatelec.com](http://www.tatelec.com).



Specification for Electro-Magnetic Buzzer (SMD Type)				Page 2 of 7	
				Des.	Chk.
Model No.:	BM5020S-0540-12	Part No.		Li YanFei	Jiang Yin
				11/15/2022	11/15/2022


A. SCOPE

This specification applies magnetic buzzer, BM5020S-0540-12

B. SPECIFICATION

No.	Item	Unit	Specification	condition
1	Oscilation Frequency	Hz	4000	
2	Operating Voltage	V	3~7	
3	Rated Voltage	V	5	
4	Current Consumption	mA	MAX.130	at Rated Voltage
5	Sound Pressure Level	dB	MIN.75	at 10cm at Rated Voltage
6	Coil Resistance	Ω	12 \pm 3	
7	Operating Temperature	$^{\circ}$ C	-20~+70	
8	Storage Temperature	$^{\circ}$ C	-40~+85	
9	Dimension	mm	5 \times 5 \times H2.0	See appearance drawing
10	Weight(MAX)	gram	0.1	
11	Housing Material		LCP(Black)	
12	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
13	Environmental Protection Regulation		RoHS	

C. APPEARANCE DRAWING

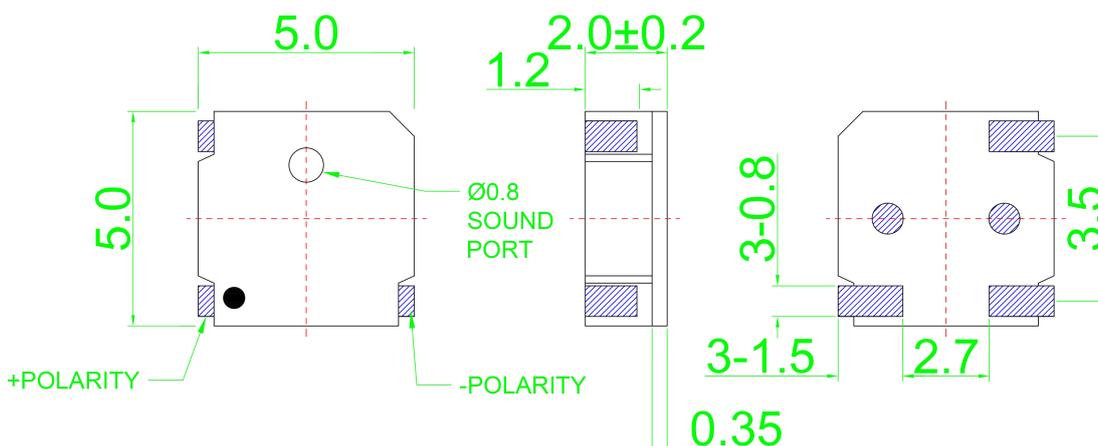



Specification for Electro-Magnetic Buzzer (SMD Type)				Page 3 of 7	
				Des.	Chk.
Model No.:	BM5020S-0540-12	Part No.		Li YanFei	Jiang Yin
				11/15/2022	11/15/2022

Tol: ± 0.3 Unit: mm


D. TESTING METHOD

Standard Measurement Conditions:


Temperature: $25 \pm 2^\circ\text{C}$ Humidity: 45-65%

Acoustic Characteristics:

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below (Recommend Driving Circuit)

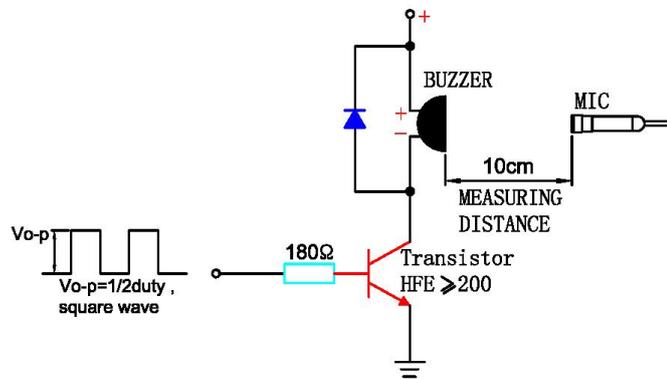


In the measuring test, buzzer is placed as follows:

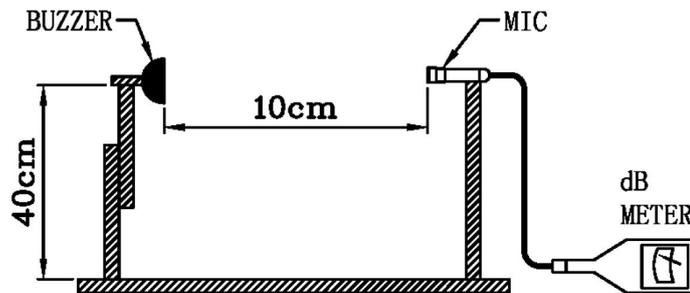


E. Typical Frequency Response Curve



Specification for Electro-Magnetic Buzzer (SMD Type)			Page 4 of 7
Model No.:	Part No.	Des.	Chk.
BM5020S-0540-12		Li YanFei	Jiang Yin
		11/15/2022	11/15/2022

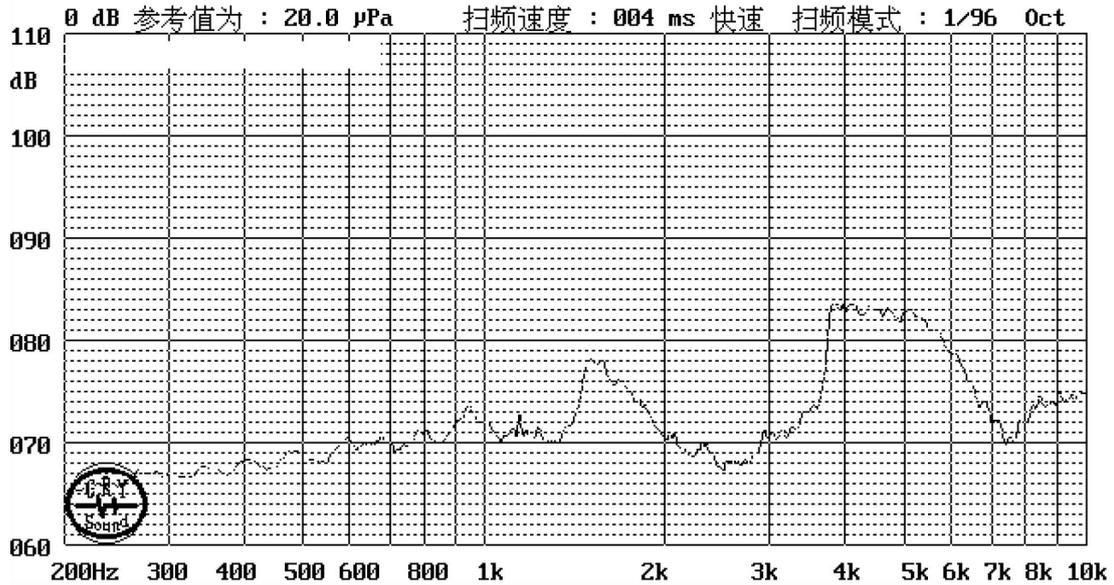

F. Recommend Driving Circuit

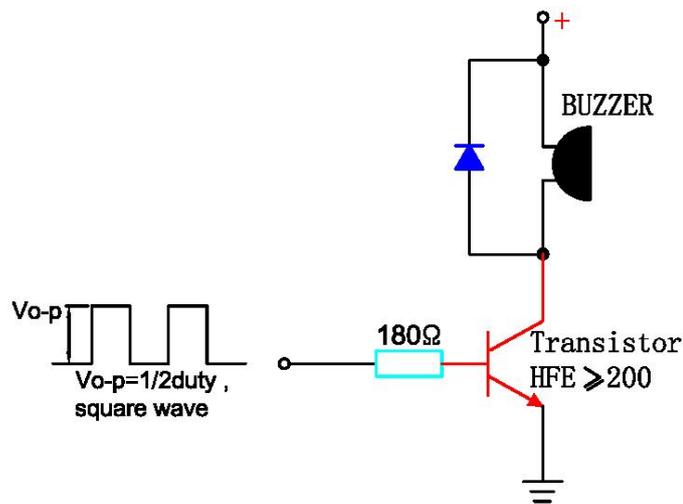

The base current I_b should high enough so that it saturates the collector current of the transistor with the CB load.


G. Soldering Condition

(1) Recommendable reflow soldering condition is as follows (Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed after heat of product goes down to normal.



Specification for Electro-Magnetic Buzzer (SMD Type)				Page 5 of 7	
				Des.	Chk.
Model No.:	BM5020S-0540-12	Part No.		Li YanFei	Jiang Yin
				11/15/2022	11/15/2022

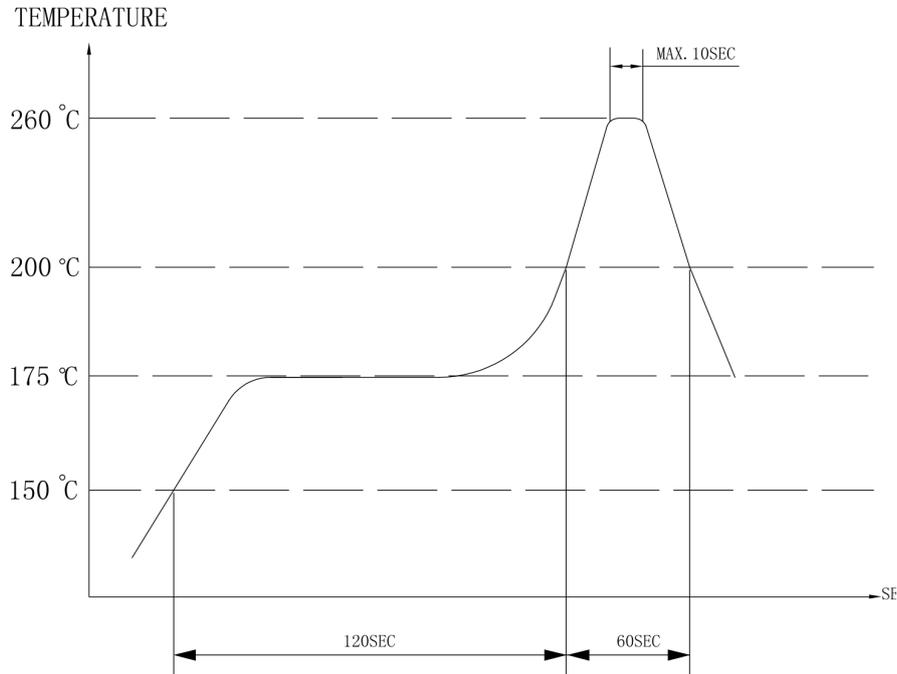

Heat resistant line (Used when heat resistant reliability test is performed)

(2) Manual soldering

Manual soldering temperature 350°C within 5 sec.

H. RELIABILITY TEST

NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	After being placed in a chamber with 85±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
2	Low Temperature Test (Storage)	After being Placed in a chamber with -30±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: ±10dB.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test:±10dB.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40±2°C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test:±10dB.
4	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of:



Specification for Electro-Magnetic Buzzer (SMD Type)			Page 6 of 7
Model No.:	Part No.	Des.	Chk.
BM5020S-0540-12		Li YanFei	Jiang Yin
		11/15/2022	11/15/2022

		<p>The part shall be subjected to 5 cycles. One cycle shall be consist of:</p>
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm . Allowable variation of SPL after test: ±10dB.
6	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours . Allowable variation of SPL after test: ±10dB.
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300±5°C for 3±1 seconds . 90% min. lead terminals shall be wet with solder (Except the edge of terminals).
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds. No visible damage and cutting off.

TEST CONDITION.

Standard Test Condition : a) Temperature : +5 ~ +35°C b) Humidity : 45-85% c) Pressure : 860-1060mbar

一般测试条件 : a) 温度 : +5 ~ +35°C b) 湿度 : 45-85% c) 气压 : 860-1060mbar


Judgment Test Condition : a) Temperature : +25±2°C b) Humidity : 60-70% c) Pressure : 860-1060mbar

争议时测试条件 : a) 温度 : +25 ± 2°C b) 湿度 : 60-70% c) 气压 : 860-1060mbar


I. PACKING STANDARD




Specification for Electro-Magnetic Buzzer (SMD Type)			Page 7 of 7	
			Des. Chk.	
Model No.:	BM5020S-0540-12	Part No.	Li YanFei Jiang Yin	
			11/15/2022 11/15/2022	

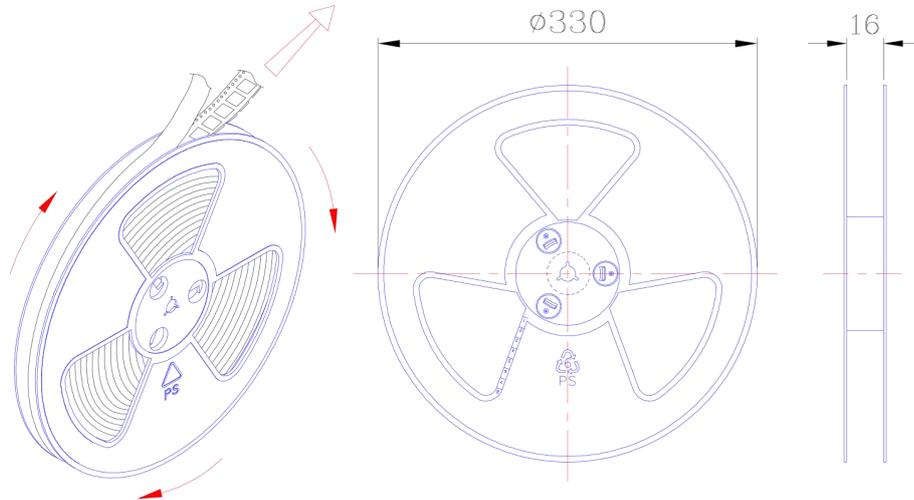

1 Reel : 3000PCS

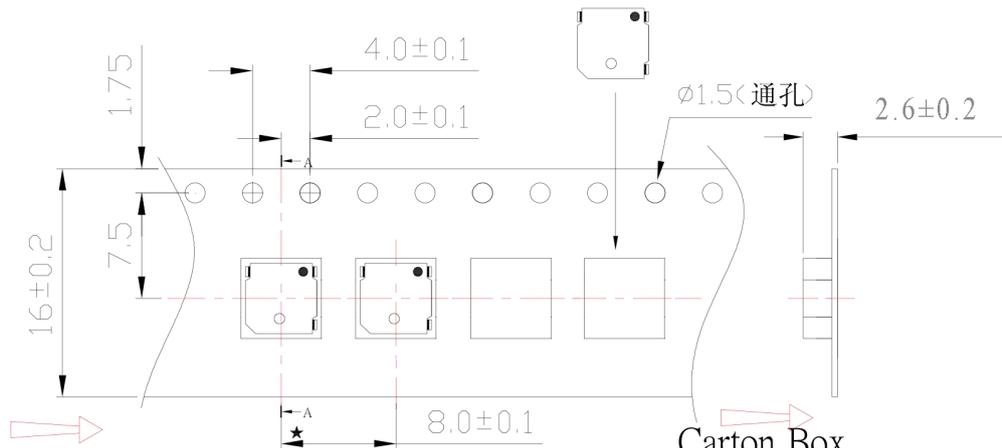

Carton Box
(10 Inner Box)

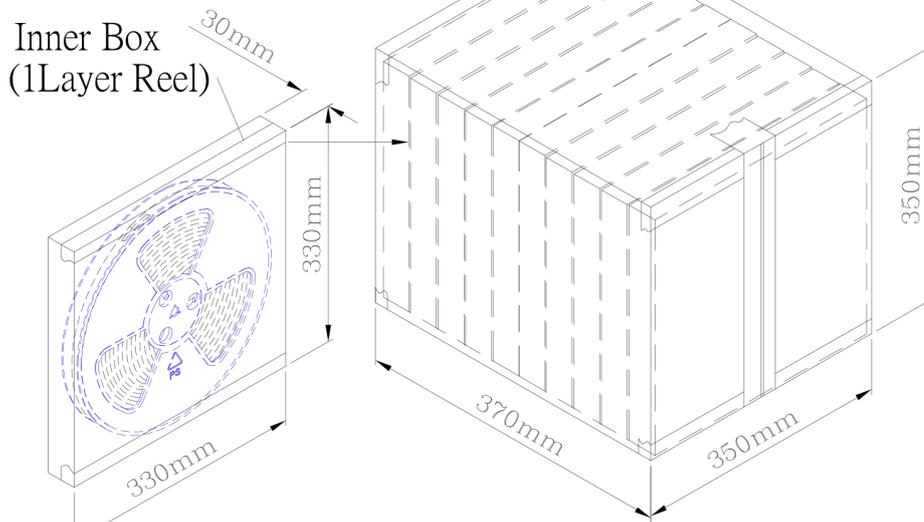

Inner Box	330mmx330mmx30mm	1x3000PCS=3000PCS
Carton Box	350mmx350mmx370mm	10x3000PCS=30,000PCS